



NASDAQ:DOGZ

Dogness Smart Cam Feeder Instruction Manual

Entrusting Party: Dogness Group LLC


Address of Entrusting Party: 4116 W Spring Creek Parkway, Plano, TX 75024

Manufacturer: Jiasheng Enterprise Co., Ltd.

Address of Manufacturer: Tongsha New Industry Park , Tongsha Community,
Dongcheng Street of Dongguan City, Guangdong Province, 523127 China

Website: www.dogness.com

Customer Service Hotline: 1-833-Dogness (364-6377)



Please read the manual carefully before using the product

Thank you for purchasing DOGNESS smart products. For your safety and benefit, please read the product manual carefully before using the product. If you fail to follow the instructions or do not follow the precautions, DOGNESS will not be liable for any personal injury, property or other loss except as expressly provided by law.

About Product Manual

The authorization, trademark and brand name of the manual belong to DOGNESS and other related parties. If the contents of the manual are inconsistent with the actual products (including App), the actual products (or App) shall prevail. DOGNESS reserves the right to interpret and modify the instructions within the scope permitted by law. If you have any objection to any content or terms of the instruction manual, please make a written objection to DOGNESS within 7 days after the purchase, otherwise you are deemed to have agreed, understood and accepted all contents of the instruction manual.



Andriod



iOS



Scan to download

Specifiction

Product name: Dogness smart cam feeder

Model: F01

Product size: 437*206*418mm

Net weight: 3KG

Capacity: 6L

Material: ABS/304 Stainless Steel

Camera: 165 ° HD night-vision wide Angle

WiFi band: 2.4G Only


App installation requirements: Android5.0 / ios

7.0 and above



Adapter:

Input: 110-240V, 50/60HZ, 0.4A

Output: 5.0V, 1000mA

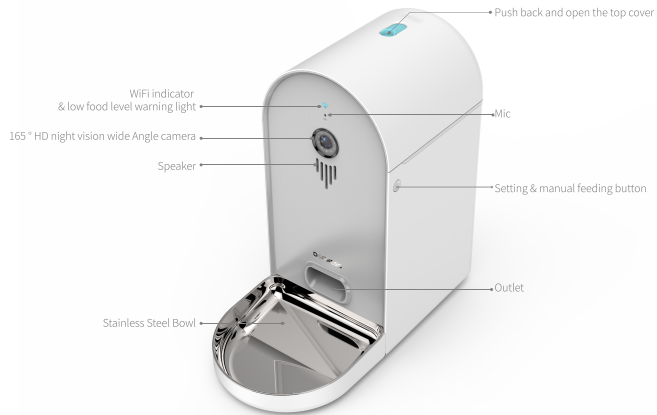


RESET button: short press - feed button, long press 6 seconds to restore to factory Settings, and the green light flashes slowly
 WiFi indicator light: green quick flashing means connection, green light is always on means connection is successful

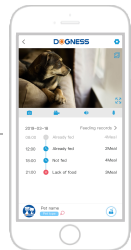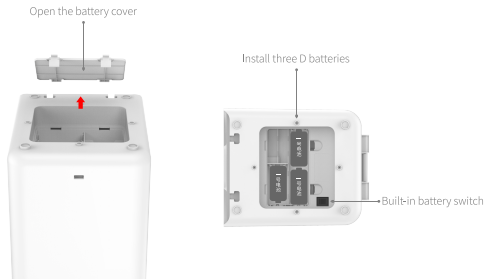


Note: when using battery power only, the feeder can only work offline. It cannot be connected to the network and will be fed according to the feeding plan set last time

- (1) Powering the device through USB to operate the device (only when the built-in battery is used, the device cannot be networked)
- (2) The device is best used in a barrier-free environment within 10 meters from the setting of WiFi router

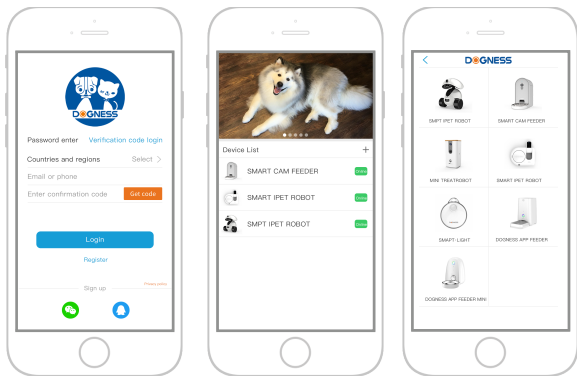


Enter the account password to log in. After entering the page, click the "+" in the upper right corner.
Go to the device selection page and select the device to connect to.

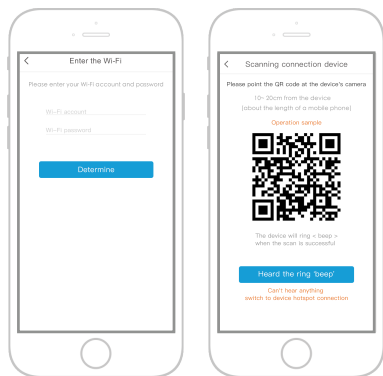


Enter the WiFi account password of the current mobile phone connection,
and then click "ok" to generate the QR code




Use the device camera to scan the QR code generated by the app and wait to hear a "beep"
Click on the QR code page to hear the ringtone "beep" option.

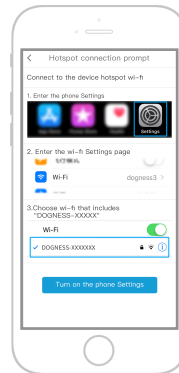


If the device cannot scan the QR code for a long time due to environmental factors and clicks on the QR code to operate without any feedback, enter the hot spot connection mode and follow the instructions on the page.

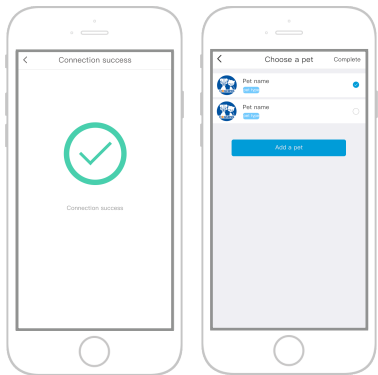


Connection successful, enter pet information, start using

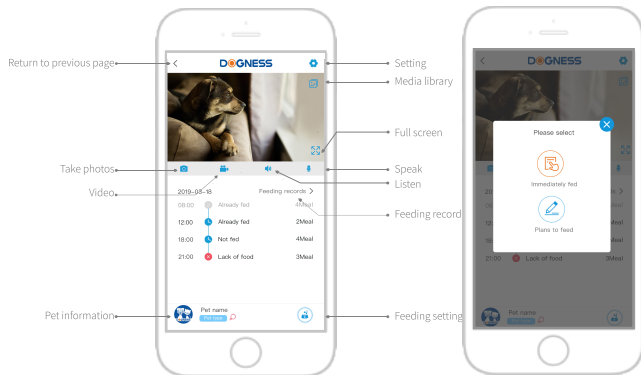

Feeding main interface

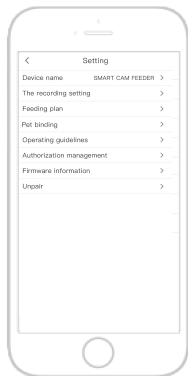

Click the "Setting" button in the upper right corner of the feeder's home page
Enter the design page and select the corresponding project for self-setting

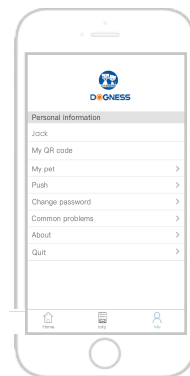

Exit the control page, click the user button in the lower right corner of the main page to enter the "I" page
and select the corresponding project for self-setting.

Function status of the feeder indicator light

Dogness Smart Cam Feeder	Functional classification	Describe					
	Reset button	1. Short press (hold for less than 1 second) to manually feed 1 portion 2. In configuration mode, the green light flashes slowly (0.5 second dark, 0.5 second bright) 3. In the configuration mode or connected state, press and hold for more than 6 seconds, hear "ding dong" for reset operation, scan the QR code, hear the "du" sound prompt sound, first green light flash, green light after networking success.					
	Red and green pilot lights	External power supply	Battery powered		STATMENTS		
		ALARM	LINK	ALARM		LINK	
		Not lit	Slow flash				Configurable status
		Not lit	Flashing				Connecting to network
		Not lit	Normally on				Network connection successful
		Slow flash	Not lit	Slow flash		Not lit	Block feeding or abnormal in place
			Not lit	Flashing		Not lit	Insufficient surplus
			Normally on	Not lit	Power supply indicator		
Record function	1. Settings -- recording Settings - add recording - click the recording button on the mobile phone to talk to the device -- release the recording - click the trial and listen to the recording 2. Number of recordings: 3						

CAUTIONS

- Please fill up the food bin before using the product for the first time.
- Do not pull the power cord directly when plug in/out the adapter.
- Do not put or insert any foreign products into the feeder and do not attempt to open or repair the feeder by yourself.
- Please use the original power adapter and original wire.
- When the residual grain light is on, the feeder can only be transferred to about 15 divisions (5g calculation for each division). Please add food in time.
- When powered only by batteries, the feeder can only work offline, it will have no network connection, but will maintain the feeding schedule.
- This product is suitable for indoor use only.
- Only load the bin with dry food, do not place any object other than food in the bin.
- This device contains electronic parts, and does not contain water proof function, it is highly recommended to keep device away from water.
- This product is not suitable for any purpose other than accompanying the purchaser's own pet.
- Users (including children) who lack relevant experience and knowledge, should restrain themselves from cleaning or maintaining this product, specially children that are not under adult supervision.
- If the product malfunctions, odor, smoke, abnormal heat, please stop using this

FAQS

- What is the reason that the indicator light appears the wrong color when it is first used?
Answer: Before use for the first time, please fill the storage grain barrel and press the reset key to reset and keep the storage grain barrel clean so as not to disturb the residual grain alarm.
- What is the reason that there is no food to drop into the food pot when the mobile video link sends a feeding request?

Answer: There may be:

(1) The rotating shaft is rotating but the food can not be detected. We suggest that you to check whether the barn is empty or not.

(2) Maybe caused by network delay or disconnection. Repeated feeding is suggested to check if it is normal.

3. Why video cannot be watched continuously?

Answer: Make sure your feeder is powered properly, and check if your phone and the feeder are connected properly.

4. What can I do if my App account suddenly fails to log in?

Answer: First, make sure that the network is normal, and then check if someone else is logging in to your account.

Otherwise, it is recommended that you install App again uninstalling, and then try to login. If your phone uses android system, you can also try the following: Your phone -- setting -- application management -- DOGNESS -- clear data -- clear cache, and then login.

5. I want to change the account number of the App, which is being used. How should I operate it?

Answer: Our App does not support direct replacement of the account. If you really need to change, please register a new account with the new mailbox and unbind the original account under the feeder. And then bind the new account to the feeder.

Remark: Press and hold the SET button for 6 seconds for new account connection or reconnection attempts. Release the button when the connection indicator light slowly flashes. The device will reset, and then scan and bind the QR code after hearing the sound of "ding dong".

6. If you have any other questions, please visit the website below to check:

<http://www.dognessnetwork.com/help/index.html>